

RLRB SERIES RADIANT BROILER



WELDED #304 STAINLESS STEEL
For easy cleaning and long life



REMOVABLE FIRE BOX
For easy cleaning and maintenance





**EXTENDED BURNERS
-18" LENGTH**
For better heat distribution



AVAILABLE OPTIONS:

- 1/2" Steel Rolling Rod Grates
- 4" Legs (Accessory)
- Floor Model Accessory

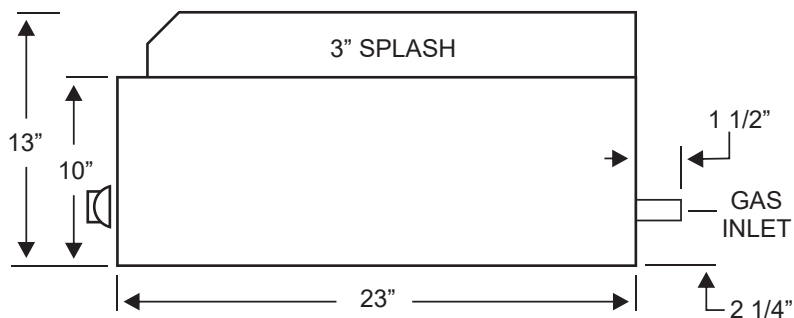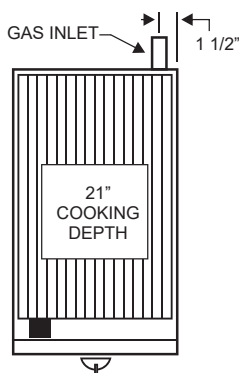

MODEL	WIDTH	DEPTH	BTU	BURNERS	WT. (EST)*	WT. (EST)*
RLRB-23-12R	12"	23"	28,000	1	65	85
RLRB-23-17R	17"	23"	28,000	1	80	100
RLRB-23-22R	22"	23"	56,000	2	110	130
RLRB-23-27R	27"	23"	56,000	2	125	145
RLRB-23-32R	32"	23"	84,000	3	155	180
RLRB-23-37R	37"	23"	84,000	3	175	200
RLRB-23-42R	42"	23"	112,000	4	195	225
RLRB-23-47R	47"	23"	112,000	4	215	245
RLRB-23-52R	52"	23"	140,000	5	245	280

▶ PRODUCT SPECIFICATIONS:

 BODY 18 Gauge #304 Stainless Steel, Fully Welded	 FIRE BOX 16 Gauge #304 Stainless Steel, Fully Welded	 FRONT Removable 18 Gauge #304 Stainless Steel Panel	 TOP GRATES Heavy Duty Cast Iron w/Adjustable Rear Height	 RADIANTS 12 Gauge Stainless Steel	 BURNERS 28,000 BTU Cast Iron, H Burner short
 DRIP PAN 18 Gauge #304 Stainless Steel	 VALVES Heavy Duty Brass	 GAS INLET 3/4 NPT	 GAS PRESSURE 4.0" Natural, 10.0" Propane (Inches Water Column)	 LEGS (FLOOR MODEL) #304 Stainless Steel tubing with bullet, Casters or seismic options	

▶ NOTES:

Gas Pressure Regulator is supplied and must be installed Non-Combustible Locations Only:

- 0" Clearance sides and back
- Specify counter or floor model
- Specify type of gas and altitude if over 2,000 feet



Connerton reserves the right, without notice, to make changes and revisions in product specifications, materials and design, which in our opinion will provide better performance, durability and efficiency.